



Shielding and Lightning Performance



Size	NOMEX PPS	Copper/Nickel Class 27 ASTM B355	Ro max
6			4.2 mΩ/m
11			3.7 mΩ/m
14			3.5 mΩ/m
17			2.7 mΩ/m
23			2.2 mΩ/m
30			2.0 mΩ/m
38			1.8 mΩ/m

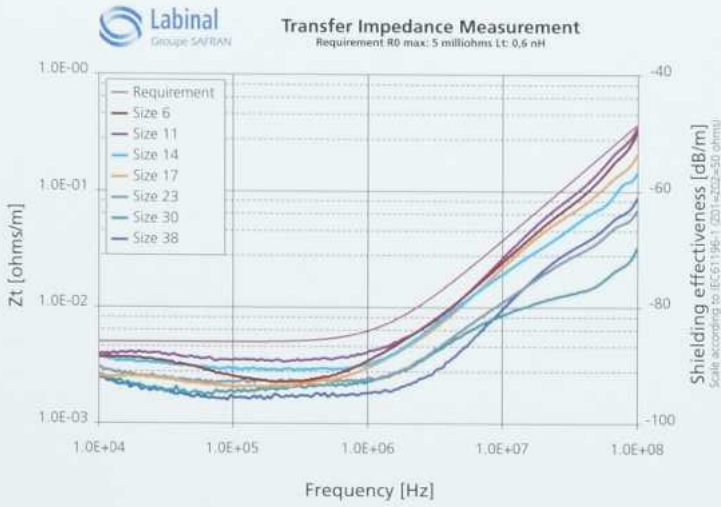

Asymmetric Break-out



Repaired Junction

